

Study on aerobic granular sludge formation in sequencing batch reactors for tapioca wastewater treatment

- **Nguyen Thi Thanh Phuong**

University of Technology, VNU-HCM

- **Nguyen Van Phuoc**

- **Thieu Cam Anh**

Institute for Environment and Resources, VNU-HCM

(Manuscript Received on January 21st, 2013, Manuscript Revised May 04th, 2013)

ABSTRACT:

Aerobic granular sludge has attracted extensive interest of researchers since the 90s due to the advantages of aerobic granules such as good settling ability, high biomass accumulation, being resistant to high loads and being less affected by toxic substances. Studies, however, which have mainly been carried out on synthetic wastewater, cannot fully evaluate the actual ability of aerobic granules. Study on aerobic granular sludge was performed in

sequencing batch reactors, using seeding sludge taken from anaerobic sludge and tapioca wastewater as a substrates. After 11 weeks of operation, the granules reached the stable diameter of 2- 3 mm at 3.7 kgCOD/m³.day organic loading rate. At high organic loads, in range of 1.6 - 5 kgCOD/m³.day, granules could treat effectively COD, N, P with performance of 93 - 97%; 65 - 79% and 80 - 95%, respectively.

Keywords: *Aerobic granular sludge, sequencing batch reactor, tapioca wastewater.*

INTRODUCTION

Aerobic granular sludge formation and applying them in practical wastewater treatment was concerned for many years with some advantages as follows: high Stability and flexibility, Low energy requirements, Reduced footprint, Good biomass retention, Reduced investment and operational costs.

Traditionally, flocculated sludge with low settling velocities is applied and large settling tanks are needed to separate clean effluent from the organisms. Besides large settling tanks,

separate tanks are needed to accommodate the different treatment processes. Conventional processes need many steps for nitrogen, COD and phosphate removal, with large recycle flows and a high total hydraulic retention time. Surplus sludge from a municipal wastewater plant needs different steps to dewater (e.g. thickening and filterpressing) before it can be processed. To overcome the disadvantages of a conventional wastewater treatment plant, biomass has to be

grown in a compact form, like aerobic granular sludge.

The new aerobic granular sludge technology has the ability to contribute to and improve the biological treatment of wastewater. Compared to present wastewater treatment plants, similar efficiencies at lower costs can be achieved with the compact aerobic granular sludge technology.

Granular sludge was first found in anaerobic upflow anaerobic sludge blanket (UASB) reactors to treat industrial wastewaters at the end of the 1970s (Lettinga, 1980) [9]. Anaerobic granular sludge consists mainly of methanogenic, syntrophic acetogenic and various hydrolytical-fermentative bacteria and has been widely applied in full-scale anaerobic reactors for wastewater treatment since the 1980s (Hickey, 1991) [6]. Aerobic granular sludge is developed under aerobic conditions and mainly used for the aerobic degradation of organics and also for nitrogen removal under aerobic and anoxic conditions (Liu, 2004) [11]. Aerobic granular sludge was first reported in a continuous aerobic upflow sludge blanket reactor by Mishima and Nakamura (1991) [12]. Aerobic granules with diameters of 2 to 8 mm were developed, with good settling properties. Aerobic granulation has since been reported in sequencing batch reactors (SBRs) by many researchers (Morgenroth et al., 1997; Beun et al., 1999; Peng et al., 1999; Etterer and Wilderer, 2001; Tay et al., 2001a; Liu and Tay, 2002) and has been used in treating high-strength wastewaters containing organics, nitrogen and phosphorus, and toxic substances (Jiang et al., 2002; Moy et al., 2002; Tay et al., 2002e; Lin et al., 2003; Yang et al., in press). Development of biogranules requires aggregation of microorganisms. This study attempted to observe the biomass profile and reactor performances for the treatment of COD, N and P with the presence of successfully developed aerobic granular sludge.

MATERIALS AND EXPERIMENTAL PROCEDURES

Experimental set-up

Experiments were performed in an open, cylindrical column typed SBR with a working volume of 5 L shown in Figure 1. Diameter, height of this model and working height are 90 mm, 1000 mm and 800 mm, respectively. Influent was fed from a storage canister at a loading rate of 1.2 kgCOD/m³.day. Aeration was provided by means of air bubble diffusers at a superficial air velocity of 5 L/min. The reactor was operated in successive cycles of 3 h comprehended a feeding period of 5 minutes, a reaction period of 170 minutes, a settling period of 2 minutes, an effluent withdrawal period of 3 minutes. Granular development stage was operated in a time sequence of 5 minute filling, 170 minute aeration, 3 minute settling and 2 minute withdrawal. The short settling time enhanced the granular development, enabled to select and retain good biomass, primarily granules which settling velocity is higher than 8 m/h.

Wastewater and seed sludge preparations

Experiments were conducted with tapioca wastewater (after anaerobic tank) taken at cassava starch-processing plants in Binh Phuoc province (table 1). A suitable amount of nutrients were supplemented to ensure a feed COD:N:P ratio of 100:5:1. Prior to feeding the pH of the mixed liquor was adjusted to a level of between 6.8 and 7.2 using 1M NaHCO₃ or 1M NaOH and 1M HCL.

The initial seeding sludge was anaerobic sludge taken at Cassava starch processing factory in Binh Phuoc province. The initial MLSS and MLVSS concentration in the reactor were 7,273 mg/L, 4,500 mg/L, respectively. And the ratio between MLVSS and MLSS was 62.3%.

Table 1. Characteristics of tapioca wastewater taken at cassava starch- processing plants in Binh Phuoc

Parameters	Unit	Values
pH	-	5.4 ± 0.3
COD	mg/L	2,842 ± 308
BOD	mg/L	1,801 ± 103
SS	mg/L	800 ± 30
N-NH ₃	mg/L	19.2 ± 3.5
Total Nitrogen	mg/L	72.3 ± 5.8
P-PO ₄ ⁻	mg/L	23 ± 5

Analytical methods

The diameter of granules was determined using a microscope model Olympus BX 51 with an attached DP 71 camera. The sludge structure and inner microbial organization were characterized by Gram staining according to Hucker and Conn methods. The microbial morphology was observed by using Olympus BX 51 microscope afterward. Parameters such as MLSS, MLVSS, COD, SVI, N-NO₃⁻, N-NO₂⁻, Total Phosphorous, and alkalinity were carried out according to Standard Methods [8].

Reactor operation

The experiment were carried out in two stages: the first stage is sludge acclimation and aggregation; the second one is granule maturation and loading increasing. The reactor was operated in batch mode, feeding and withdrawal automatically. Each cycle had four steps: influent filling, aeration, settling and effluent withdrawal.

RESULTS AND DISCUSSION

Sludge acclimation and aggregation stage

After one week of acclimation, anaerobic biogas sludge has transformed completely into aerobic sludge, shown by the color of sludge (switch from black to dark brown); MLSS increased from 3,584 mg/L to 4,932 mg/L, while the ratio of MLVSS / MLSS increased from 50.1% to 75% (Figure 2).

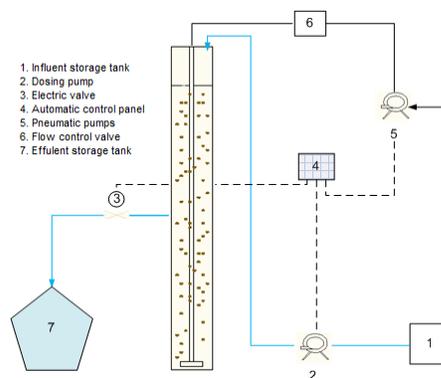


Figure 1. Experimental diagram

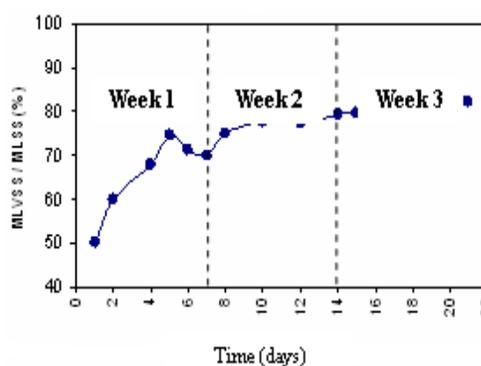


Figure 2. Change of MLVSS / MLSS ratio at the organic loading rate of 1.2 kgCOD/m³.day

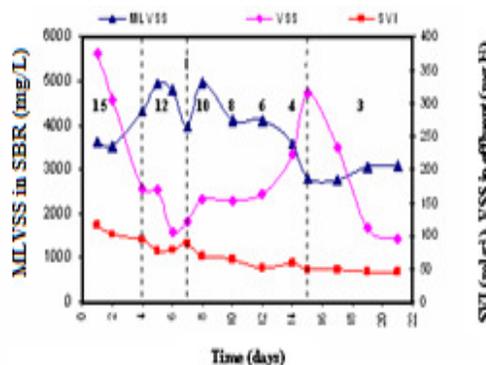


Figure 3. Change of SS, VSS in SBR corresponding to different operation time.

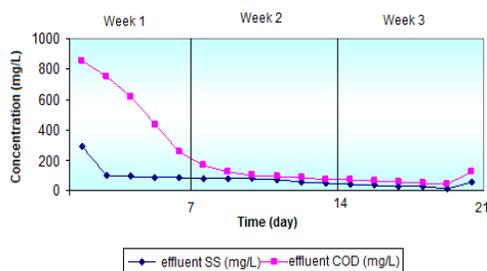


Figure 4. Change of COD at the OLR of 1.2 kg COD/m³.day

Although biomass content reduced, COD removal efficiency still increased from 70-81% to a stable value of 91 - 93% at the end of the 2nd week. At the same time, the ratio of MLVSS / MLSS increased to value of 79 % at the 14th day. Protozoa appeared in sludge such as Rotifer, Cilia, and Flagella.... At the 3rd week, the settling time was maintained at the value of 3 minutes, biomass content decreased to 2754mg/L as a result. However, COD removal efficiency was still higher than 92% (Figure 4) and the sludge volume index (SVI) was lower than 50 mL/g due to a drop of water content in sludge and an increase in biomass density. It indicated that aerobic granules were formed, which can settle well and can treat the COD in wastewater. At the end of 3rd week, biomass content increased to 3000 mg/L because aerobic granular systems promote better biomass retention compared to initial sludge, in addition, VSS concentration of effluent was under 100mg/L (Figure 3 and 4).

At this time, the sludge color switched from dark brown to light brown, sludge flocs had a tendency to segregate. Granular core appeared in streak shape, which had a diameter of 2mm (Figure 5.e). Granules core was formed; the rate of MLVSS / MLSS also increased rapidly and reached the value over 80% at the end of the 3rd week (Figure 2).

Development of granules (from the 4th week onwards)

After 22 days of operation (the 4th week), granules began to appear and increase about both diameter and density afterward. The sludge in the reactor was nearly completely granulated, and visually no suspended biomass was present. Due to the intensive mixing by aeration, the granular sludge became spherical with a smooth surface. At the 6th week, other forms of Rotifer and Cilia appeared at higher density, and Rotifer was still dominant (Figure 7.b, c). From week 7 to 9 (at the loading of 2.5kgCOD/m³.day), the microorganism as Protozoa, Rotifer, Cilia, Flagella... in the granules gradually disappeared, bacteria were the majority of granules (Figure 7.d).

Aerobic granules diameter reached 2mm after 6 weeks (Figure 5.d) and was stable until the 13th week. Most of the biomass was kept in the reactor due to the good settle ability. After the granules matured point, the granules were stable and dynamically balanced in the maturation phase. In this phase, the granular size might still be shifting mainly between 2.0 and 3.0 mm, but slowly and slightly, depending on the change of operational conditions. And the mature granules contained Filamentous in core; the next layers were bacteria (mainly Gram negative), fungi, and protozoa (Figure 7.e). At week 11, density of bacteria in sludge was higher (Figure 7.f). From week 11, when the organic loading rate increased from 3.7 to 5kg COD/m³.day, granule diameter continued to increase to 3mm (Figure 5f). The change of granules diameter can be shown in figure 6. When the diameter increased, however, it was difficult for the substances to diffuse into the granules core, led to broken granules if the OLR was increased. As a result, the outside layer was taken out while the black core remained. Subsequently, the broken granules recovered quickly, aggregated and increased the

biomass. The OLR was stopped at 5 kg COD/m³.day to avoid breaking granules.

At the organic loading rate of 2.5kg COD/m³.day, VSS concentration increased to 6325 mg/L (at week 8), If the OLR increased to 3.7 - 5 kgCOD/m³.day, the value of VSS would reach as high as 7360 mg/L at the loading of 5 kgCOD/m³.day (Figure 8). At OLR of 1.6 kgCOD/m³.day, SVI changed continuously in the range of 38.4 - 39.6mL/g. As OLR increased to 2.5 kgCOD/m³.day, granules were formed developed stably leads to SVI decreased from 38.4mL/g at 6th week to 26mL/g at 9th week. When increasing the OLR up to 3.7 kgCOD/m³.day, granular sludge developed more stably, tightly and heavily. It can be proved through SVI, SVI decreased from the 26mL/g at 9th week to 22.6mL/g at 11th week.

When OLR increased to 5 kgCOD/m³.day, more sludge can be formed and granules were grown, as a result, SVI increased rapidly up to 64.69mL/g at 12th week and 65.61mL/g at 13th week. Research results about SVI variation with different OLR were matched with the studies of Bui Xuan Thanh, Nguyen Phuoc Dan [21]. The change of SVI at different loading was presented in Fig 9.

In this study, the removal performances of COD, NH₄⁺, NO₂⁻, NO₃⁻, and total phosphorous were investigated. The results were shown in Figure 10, 12, 13, 14. The following would explain the removal performance. At the beginning, COD removal efficiency was 91.2%. When increasing OLR to 1.6 kgCOD/m³.day, 2.5 kgCOD/m³.day, 3.7 kgCOD/m³.day, and 5 kgCOD/m³.day COD removal efficiency was 93.2%, 95.6%, 94.8, and 95.1%, respectively. The COD removal efficiency was optimal at the organic loading rate of 2.5 kgCOD/m³.day (Figure 10). It reached the value of 95.6% while MLVSS/MLSS ratio was over 90%. Moreover,

MLVSS/MLSS ratio was always over 80% at all OLRs (Figure 11). These values were higher than using conventional activated sludge, which MLVSS/MLSS ratio was about 65 - 75% (Figure 11). The result also indicated that the biomass density was quite high in granule structure.

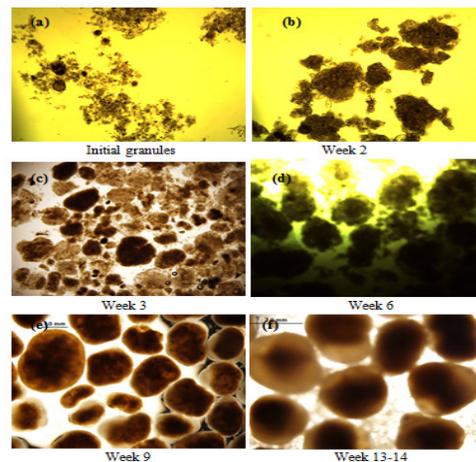


Figure 5. Granules in different weeks (a. initial granules; b. granule aggregation; c. forming granules; d. growing granules; e. stable granules; f. granular core)

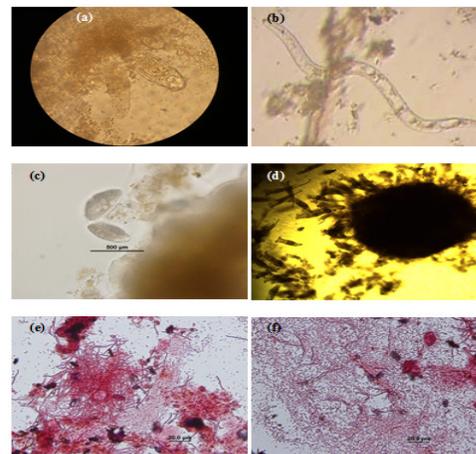


Figure 7. Microorganism in the granules (a. Rotife; b. Red Nematode; c. Cilia; d. protozoa around the granules; e. granule structure; f. bacilli and cocci bacteria)

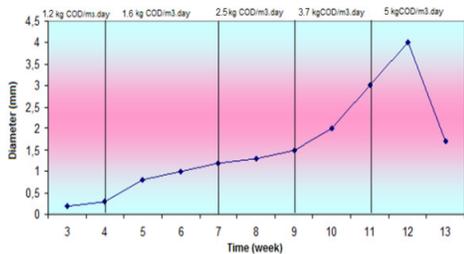


Figure 9. The variation of SVI at different organic loading rates

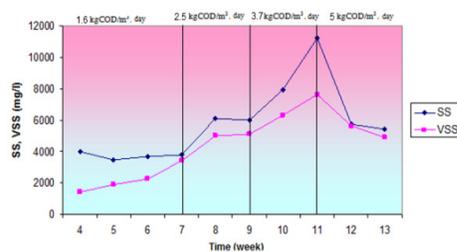


Figure 10. COD removal efficiency at different organic loading rates

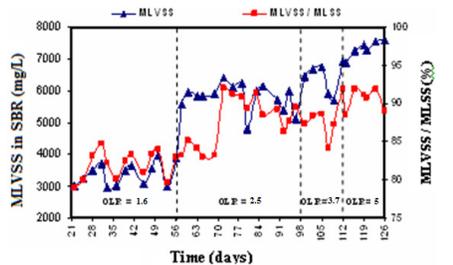
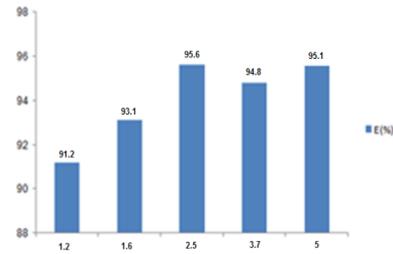
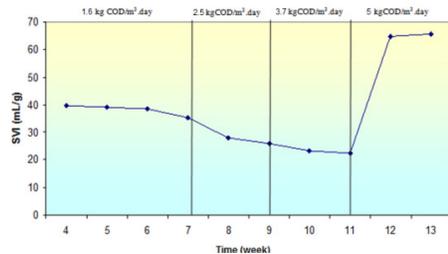


Figure 11. The variation of MLVSS and MLVSS / MLSS ratio at different organic loading rates

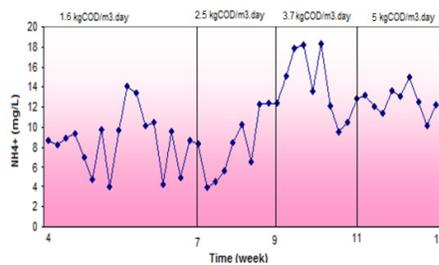


Figure 12. Change of NH₄⁺ concentration at different organic loading rates

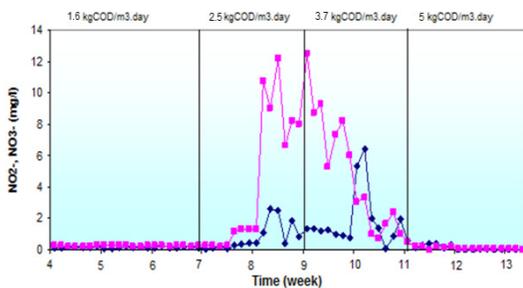


Figure 13. Change of NO₂⁻, NO₃⁻ concentration at different organic loading rates


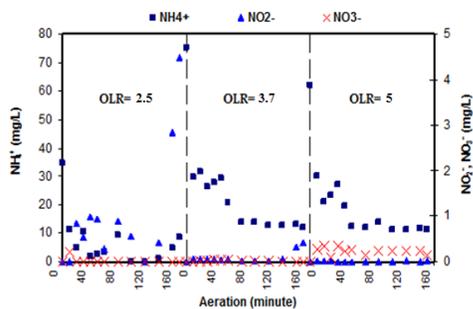


Figure 14. Variation of N concentration at different organic loading rates

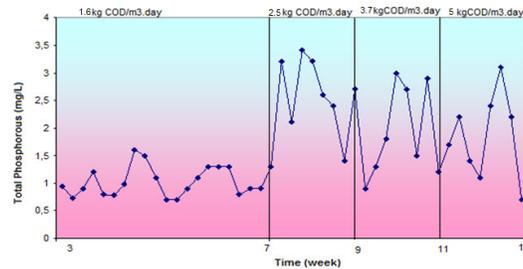

Nghiên cứu tạo bùn hạt hiếu khí trên mô hình SBR để xử lý nước thải chế biến tinh bột khoai mì

- **Nguyễn Thị Thanh Phương**

Trường Đại học Bách Khoa, ĐHQG-HCM

- **Nguyễn Văn Phước**

- **Thiệu Cẩm Anh**

Viện Môi trường và Tài nguyên, ĐHQG-HCM

TÓM TẮT:

Bùn hạt hiếu khí đã được rất nhiều nhà nghiên cứu quan tâm từ những năm của thập niên 90 do những ưu điểm của bùn hạt hiếu khí mang lại như khả năng lắng tốt, tích lũy sinh khối cao, chịu được tải trọng cao và ít bị ảnh hưởng bởi các chất độc hại. Tuy nhiên, các nghiên cứu chủ yếu được tiến hành trên nước thải tổng hợp nên chưa đánh giá được đầy đủ khả năng xử lý thực tế của bùn hạt hiếu khí. Đề tài nghiên cứu tạo bùn hạt hiếu khí trên nước thải thực tế là nước thải tinh bột mì và qua đó đánh giá hiệu quả xử lý

chất hữu cơ của bùn hạt hiếu khí. Trong nghiên cứu này, bùn hạt hiếu khí được nuôi cấy trên mô hình bể phản ứng từng mẻ (SBR) từ bùn nuôi cấy ban đầu là bùn kỵ khí. Sau 11 tuần nuôi cấy, bùn hạt kích thước ổn định từ 2 – 3mm ở tải trọng 3.7 kgCOD/m³.ngày. Với tải trọng hữu cơ cao, dao động từ 1.6 – 5 kgCOD/m³.ngày, bùn hạt xử lý hiệu quả COD, N, P với hiệu suất xử lý tương ứng đạt 93 – 97%; 65 – 79% và 80 – 95%.

Từ khóa: bùn hạt hiếu khí, SBR, nước thải tinh bột mì.

REFERENCES

- [1]. Beun JJ, Hendriks A, van Loosdrecht MCM, Morgenroth E, Wilderer PA, Heijnen JJ. Aerobic granulation in a sequencing batch reactor. *Water Res* 1999;33:2283–90.
- [2]. De Kreuk, M. K. (2006). Aerobic Granular Sludge - Scaling-up a new technology. Thesis, Department of Biotechnology, Technical University Delft, The Netherlands. 199p.
- [3]. De Bruin, L.M.M., De Kreuk M.K., van der
- [4]. Roest H.F.R., Van Loosdrecht M.C.M. and Uijterlinde C. (2004). Aerobic Granular Sludge Technology, Alternative for Activated Sludge Technology. *Wat. Sci. Technol.*49(11-12), 1-9.
- [5]. De Kreuk, M.K. and De Bruin L.M.M. (2004). Aerobic Granule Reactor Technology. London, IWA Publishing.
- [6]. Etterer T, Wilderer PA. Generation and properties of aerobic granular sludge. *Water Sci Technol* 2001;43:19–26.

- [7]. Hickey R.F., Wu W.M., Veiga M.C., Jones R.
- [8]. The start-up, operation and monitoring of high-rate anaerobic treatment systems. *Water Sci Technol* 24 (1991) 207–255.
- [9]. Jiang HL, Tay JH, Tay STL. Aggregation of immobilized activated sludge cells into aerobically grown microbial granules for the aerobic biodegradation of phenol. *Lett Appl Microbiol* 2002;35:439–45.
- [10]. Lin YM, Liu Y, Tay JH. Development and characteristics of phosphorous-accumulating granules in sequencing batch reactor. *Appl Microbiol Biotechnol* 2003;62:430–5.
- [11]. Lettinga G., van Velsen AFM, Hosma S.W., de Zeeuw W., Klapwijk A. Use of the upflow sludge blanket (USB) reactor concept for biological wastewater treatment, especially for anaerobic treatment. *Biotechnol Bioeng* 22 (1980) 699–734.
- [12]. Liu Y, Tay JH. The essential role of hydrodynamic shear force in the formation of biofilm and granular sludge. *Water Res* 2002;36:1653–65 (24).
- [13]. Liu Y., Tay J.H. State of the art of biogranulation technology for wastewater treatment. *Biotechnol Adv* 22 (2004) 533–563.
- [14]. Mishima K., Nakamura M. Self-immobilization of aerobic activated sludge - a pilot study of the process in municipal sewage treatment. *Water Sci Technol* 23 (1991) 981–990.
- [15]. Morgenroth E, Sherden T. Aerobic granular
- [16]. Sludge in a sequencing batch reactor. *Water*
- [17]. Res 31 (1997) 3191–3194.
- [18]. Moy BYP, Tay JH, Toh SK, Liu Y, Tay STL. High organic loading influences the physical characteristics of aerobic sludge granules. *Lett Appl Microbiol* 2002;34:407–12
- [19]. Peng D.C., Benret N., Delgenes J.P., Moletta R. Aerobic granular sludge - A case report. *Water Res* 33 (1999) 890–893.
- [20]. Tay JH, Liu QS, Liu Y. Microscopic observation of aerobic granulation in sequential aerobic sludge blanket reactor. *J Appl Microbiol* 2001a;91:168–75.
- [21]. Tay JH, Liu QS, Liu Y. The effects of shear force on the formation, structure and metabolism of aerobic granules. *Appl Microbiol Biotechnol* 2001b; 57:227–33.
- [22]. Tay JH, Liu QS, Liu Y. The role of cellular polysaccharides in the formation and stability of aerobic granules. *Lett Appl Microbiol* 2001c; 33:222–6
- [23]. Yang SF, Tay JH, Liu Y. Effect of substrate N/COD ratio on the formation of aerobic granules. *J Environ Eng* 2003a [in press].
- [24]. APHA. Standard Methods for the Examination of Water and Wastewater. American Public Health Association, Washington, DC (2005).
- [25]. Bui Xuan Thanh, Nguyen Phuoc Dan. Application of aerobic Granule for Nitrogen removal of fishery wastewater.
- [26]. Metcalf and Eddy. *Wastewater Engineering* (1991).